

# WATA



## FER 27 SOFTENER



**Compact,  
versatile valve.**

### About Wata

DESIGN WITH CARE, this is also Wata's philosophy: innovative products, designed with care and built with the finest materials and the best components.

Each product is created keeping in mind its installation and after-sales service.

### FER 27 SOFTENER




- Simple and elegant design.
- Numerous possibilities of customization.
- 90° adjustable and removable controller.
- 102 mm from the top of the tank.
- Upflow regeneration.
- Available with proportional brining.
- Programmable regeneration cycle times.
- Mixing valve to control hardness.
- No pressure to brine tank during service.
- Soft water regenerant refill.





## Specifications and performances

- Valve body: Noryl.
- Tank sizes: 6" - 13".
- Resin volumes: 4 - 80 liters.
- Service flow rate: 3,2 m<sup>3</sup>/h @ 1 bar drop.
- Operating pressures: 1 - 8 bar.
- Water temperature: 1° - 45°C.
- Ambient temperature: 1° - 50°C.

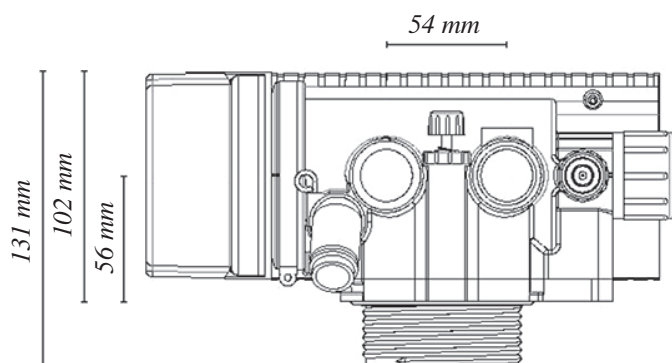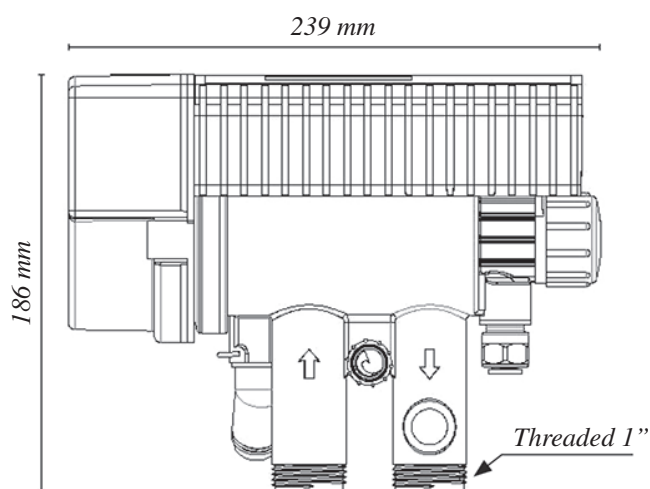

Scale 1:2.7